


MINITRUNKING SYSTEMS

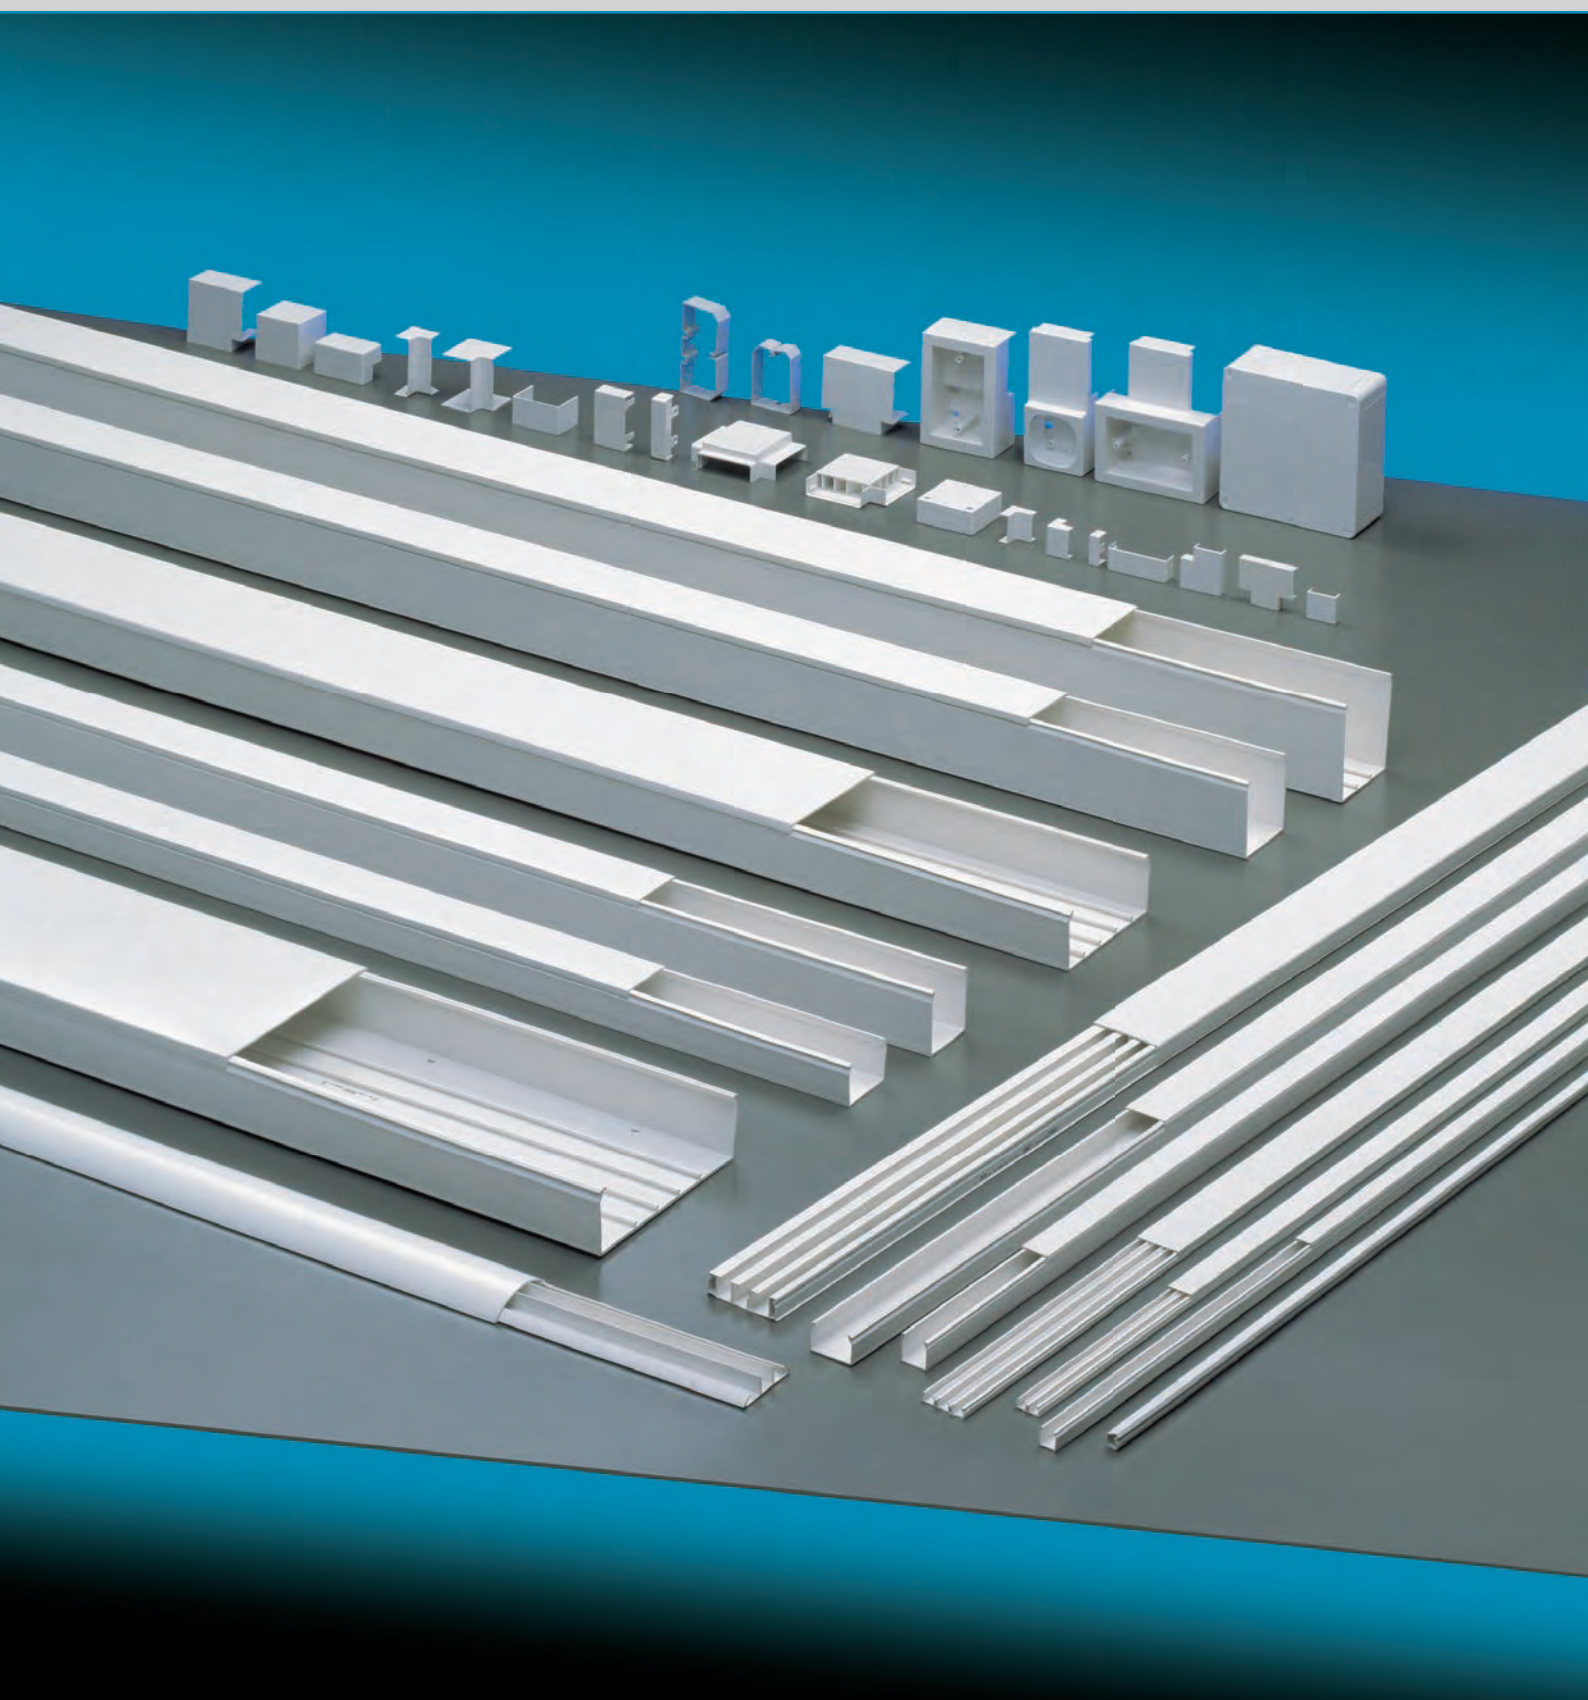

MAIN TECHNICAL FEATURES

Material: technopolymer on rigid PVC base, self-extinguishing V0 (UL94) and high resistant to UV rays.

Standard colours: white RAL 9001, grey RAL 7030 or brown RAL 8014.

System protection degree: IP40 (trunking + accessories).

Resistance to mechanical shocks MC series :IK 07 (shocks up to 2J).

Resistance to heat in continuous use: up to +70° C.

Resistance to abnormal heat: up to 650° C (Glow Wire Test, Reference Standard IEC 60695-2-11).

Insulation resistance: > 100MΩ.

Dielectric voltage > 3.000 V~.

Installation temperature range: minimum -5° C, maximum +60° C.

Standard length: 2 mt bars.

Reference standards: EN 50085-1, EN 50085-2-1.

Products meeting the safety objectives of Low Voltage Directive 2014/35/EU (Annex I).

Products in compliance with RoHS II - 2011/65/EU directive + 2015/863/EU.



Minitrunking with front-hooking cover
Series MC
page 34




Minitrunking with wrap-around cover rounded edges
Series MC
page 36



Minitrunking with wrap-around cover
Series MCA
page 37



Self-adhesive minitrunking with hinged cover
Series MA
page 38




Minitrunking systems
Series MC-MCA
page 40



Floor trunking
Series CAP
page 52



Modular floor boxes
Series 160
page 53

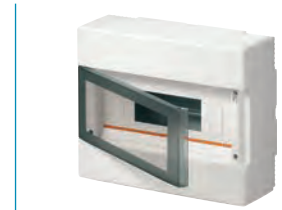

Wall mounting modular enclosure IP40 white RAL 9001 with transparent door
Series 600 page 54

MAIN TECHNICAL FEATURES

Externally grooved bottom for a fast fixing by glues or silicone adhesives

Wrap-around cover without sharp edges, functional modern design

In the trunkings with wrap-around cover the lid can be removed only by a proper tool

The particular form makes the most of the inner room and permits to unify the accessories




Perforated bottom for a quicker and more precise installation

The minitrunkings can have 1,2 or 3 internal compartments for any distribution need

The bottom of the wrap-around trunkings has got a spacing profile for the installation in the corner

Accessories for change of direction for any installation need

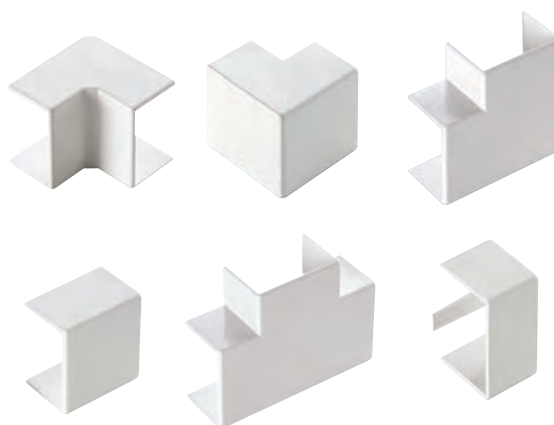

Fully made of self-extinguishing technopolymer on PVC base and available in white RAL 9001 or, on request, in grey RAL 7030 and brown RAL 8014, the minitrunkings are characterized by perfectly symmetric inner compartments; they can be easily installed on the wall, as skirting board and also in the corner, thanks to the spacing profile (in the version with wrap-around cover), which keeps the trunking distant enough from the wall, so that the cover can be set without any problem.

The wide range of minitrunkings MC and MCA with standard or wrap-around covers is composed of 28 different dimensions and types, with

an inner splitting with 1, 2 or 3 sections. The perfectly separated compartments permit to put, in the same trunking, the wires of different electric circuits: power, phone, data transmission and other, without any risk of interferences or inappropriate overlapping, according to the Standard CEI 64-8.

The derivation boxes has an appropriate grid allowing to keep the cables divided. The device boxes, equipped with a blank cover, can be also used as further junction boxes. Some sizes of the minitrunkings system are available with or without internal separator. That is an undoubted advantage for the renovation and the widening

of complex electrical systems (power, telephone, HI-FI television, SAT) without the risk of interferences.

The several accessories for the change of direction, the derivation boxes and the device boxes allow to put together a complete and functional distribution system.

The minitrunkings MC and MCA can be combined with skirting board and wall trunking system and cable trunking system, as well as the modular enclosures manufactured in the same colour as the minitrunkings, in order to fulfill the installation and renovation needs with a compact elegant functional system.

MAIN TECHNICAL FEATURES

Detail of the minitrunking with hinged cover



The closing system of the cover assures a robust shutting which makes the installation faster

The hinge is so designed to guarantee a long-lasting closing



The smoothed shape of the series MCA perfectly fits in with any environment

The minitrunkings MCA have a double-sided adhesive tape for a lasting fixing

The wall-mounting device boxes are the ideal complement to the minitrunkings

The plentiful sizes offer very good solutions also for the most demanded installations

Fully made of self-extinguishing rigid PVC and available in white RAL 9001 or, on request, in brown RAL 8014, the minitrunkings series MA has the bottom provided with a double-sided adhesive tape which permits the temporary or permanent fixing on smooth clean surfaces.

The integrated hinged cover is another peculiarity of this series. This practical solution combines in a single action the installation of

the bottom and the cover, so that the lids can't get lost during the installation or any following maintenance works.

The particular wrapping design without sharp edges looks very discreet, so that it can be used in elegant environments.

The minitrunking range is composed of 6 different dimensions, which enable the installer to choose the most suitable dimension for the

installation need.

The minitrunkings MC and MCA can be combined with skirting board and wall trunking system and cable trunking system, as well as the modular enclosures manufactured in the same colour as the minitrunkings, in order to fulfill the installation and renovation needs with a compact elegant functional system.




mounting examples



MINITRUNKINGS WITH FRONT-HOOKING COVER **SERIES MC**

MAIN TECHNICAL FEATURES:

- Made of self-extinguishing technopolymer on rigid PVC base.
- Perforated bottom for fixing by screws or plugs.
- Bottom designed for fast fixing by silicone adhesives.
- Accessories are set onto the trunking with a simple click.
- Resistance to mechanical shocks IK 07.
- Protection degree IP40 only if installed with the proper accessories.
- Front-hooking cover supplied already mounted on the bottom, standard bar length: 2m.
- Packed in strong cardboard boxes suitable for transport and storage.
- **Colour code: G = grey, M = brown.**



IP40

CE

WHITE RAL 9001

On request:

GREY RAL 7030

On request:

BROWN RAL 8014

Minitrunking with front-hooking cover


ITEM	EXTERNAL DIMENSIONS W x H mm	COMPARTMENT NR.	SECTION AREA mm ²	PACKAGING m
ECMC2010B	20x10	1	126	100
ECMC2210-1B	22x10	1	128	100
ECMC2210B	22x10	2	126	100
ECMC3010B	30x10	2	172	80
ECMC3010-1B	30x10	1	174	80
ECMC4010B	40x10	3	220	60
ECMC1517B	15x17	1	168	100
ECMC2517B	25x17	1	249	80
ECMC4017-1B	40x17	1	418	50
ECMC4017B	40x17	2	416	50
ECMC6017B	60x17	3	685	70
ECMC5020B	50x20	1	625	60
ECMC5020-1B	50x20	2	620	60
ECMC5020-2B	50x20	3	615	60
ECMC2525B	25x25	1	480	100
ECMC4025B	40x25	1	752	80



MINITRUNKINGS WITH FRONT-HOOKING COVER **SERIES MC**

MAIN TECHNICAL FEATURES:

- Made of self-extinguishing technopolymer on rigid PVC base.
- Perforated bottom for fixing by screws or plugs.
- Bottom designed for fast fixing by silicone adhesives.
- Accessories are set onto the trunking with a simple click.
- Resistance to mechanical shocks IK 07.
- Protection degree IP40.
- Front-hooking cover supplied already mounted on the bottom, standard bar length: 2m.
- Packed in strong cardboard boxes suitable for transport and storage.
- **Colour code: G = grey, M = brown.**



IP40

CE

WHITE RAL 9001

On request:

GREY RAL 7030

On request:

BROWN RAL 8014

Minitrunking with front-hooking cover – German type


ITEM	EXTERNAL DIMENSIONS W x H mm	COMPARTMENT NR.	SECTION AREA mm ²	PACKAGING m
ECMC1515B	15x15	1	148	100
ECMC1818B	18x18	1	202	100
ECMC2020B	20x20	1	264	90
ECMC3015B	30x15	1	283	80
ECMC3030B	30x30	1	652	80



MINITRUNKING WITH WRAP-AROUND COVER ROUNDED **SERIES MC**

MAIN TECHNICAL FEATURES:

- Made of self-extinguishing technopolymer on rigid PVC base.
- Perforated bottom for fixing by screws or plugs.
- Bottom designed for fast fixing by silicone adhesives
- Accessories are set onto the trunking with a simple click by 4 points.
- Resistance to mechanical shocks IK 06.
- Protection degree IP40 only if installed with the proper accessories.
- Wrap-around cover supplied already mounted on the bottom, it can be removed only by a proper tool.
- Standard bar length: 2m.
- Packed in strong cardboard boxes suitable for transport and storage.
- **Colour code: A=Slate grey.**



IP40

CE

WHITE RAL 9001

SLATE GREY RAL 7021

Minitrunkig with wrap-around cover rounded edges

ITEM	EXTERNAL DIMENSIONS W x H mm	COMPARTMENT NR.	SECTION AREA mm ²	PACKAGING m
ECMC2213-1B	22x13	1	167	100
ECMC3213-1B	32x13	1	267	80




- New **elegant design**, perfectly fits in with any environment .
- **Rounded cover**: + 30% of wiring .
- **Positioning edge** for easy fitting accessories.
- Also available in **slate grey** - colour code: A.

MINITRUNKING WITH WRAP-AROUND COVER **SERIES MCA**

MAIN TECHNICAL FEATURES:

- Made of self-extinguishing technopolymer on rigid PVC base.
- Perforated bottom for fixing by screws or plugs.
- Bottom designed for fast fixing by silicone adhesives
- Accessories are set onto the trunking with a simple click.
- Resistance to mechanical shocks IK 04.
- Protection degree IP40 only if installed with the proper accessories.
- Wrap-around cover supplied already mounted on the bottom, it can be removed only by a proper tool.
- Standard bar length: 2m.
- Packed in strong cardboard boxes suitable for transport and storage.
- **Colour code: G = grey, M = brown.**



IP20

CE

WHITE RAL 9001

On request:

GREY RAL 7030

On request:

BROWN RAL 8014

Minitrunking with wrap-around cover

ITEM	EXTERNAL DIMENSIONS W x H mm	COMPARTMENT NR.	SECTION AREA mm ²	PACKAGING m
ECMC2010AB	20x10	1	126	100
ECMC3010AB	30x10	2	172	80
ECMC1517AB	15x17	1	168	80
ECMC2517AB	25x17	1	249	60
ECMC4017AB	40x17	2	416	80
ECMC2525AB	25x25	1	480	80
ECMC4025AB	40x25	1	752	60



SELF-ADHESIVE MINITRUNKINGS WITH HINGED COVER **SERIES MA**

MAIN TECHNICAL FEATURES:

- Made of self-extinguishing technopolymer on rigid PVC base.
- High-resistance and high-holding adhesive tape on the bottom.
- Hinged cover with snapped closing.
- Standard bar length: 2m.
- Packed in strong cardboard boxes suitable for transport and storage.
- **Colour code: M = brown.**

CE



WHITE RAL 9001

On request:

BROWN RAL 8014

ITEM	EXTERNAL DIMENSIONS W x H mm	COMPARTMENT NR.	SECTION AREA mm ²	PACKAGING m
ECMA1010	10x10	1	62	200
ECMA1510	15x10	1	100	150
ECMA2010	20x10	1	128	100
ECMA12575	12,5x7,5	1	54	200
ECMA2075	20x7,5	1	94	150
ECMA125125	12,5x12,5	1	102	150



COMPONENTS OF THE MINITRUNKING SYSTEMS

The minitrunking systems are composed of the trunking and accessories for the change of direction, the joining and the derivation, that, if correctly assembled and installed, form a system with protection degree IP40.
The accessories for the change of direction are set directly on the trunking with a click.

MINITRUNKING WITH FRONT-HOOKING OR WARP-AROUND COVER
MADE OF SELF-EXTINGUISHING TECHNOPOLYMER




90° INTERNAL ANGLE FOR CHANGE OF DIRECTION



90° EXTERNAL ANGLE FOR CHANGE OF DIRECTION



90° FLAT ANGLE FOR CHANGE OF DIRECTION



STRAIGHT JOINT TO LINK 2 TRUNKING TRACKS



T JOINT FOR DERIVATIONS ON THE SAME LEVEL



END CAP TO CLOSE STRAIGHT TRUNKING TRACKS



DEVICE BOX HOLE CENTRE DISTANCE 60/67 mm
TO INSTALL DEVICES FROM DIFFERENT STANDARDS OR SCHUKO SOCKETS THANKS TO THE
DIFFERENT HOUSINGS – SIDE PRE-CUTTING FOR THE TRUNKING INLET



ADAPTOR BOXES FOR 3, 4 AND 6 MODULES
SIDE PRE-CUTTING FOR THE TRUNKING INLET




SELF-SUPPORTING BOXES FOR ITALIAN DEVICES
THEY CAN BE USED FOR DEVICES TYPE "MAGIC" OR SIMILAR ONES. THE DEVICES ARE FIXED WITHOUT
ANYSUPPORTS OR FRAMES. SIDE PRE-CUTTING FOR THE TRUNKING INLET



SEPARATION BOX FOR TRUNKINGS WITH SEVERAL COMPARTMENTS TO
SEPARATE THE DIFFERENT ELECTRICAL CIRCUITS AND TO MAKE DERIVATIONS




SELF-SUPPORTING BOXES FOR "SAILLIE" DEVICES
DEVICE BOX 45X45 mm
TO INSTALL FRENCH STANDARD DEVICES



MINITRUNKING SYSTEMS WITH WRAP-AROUND COVER ROUNDED 22x13

MAIN TECHNICAL FEATURES:

- Made of self-extinguishing technopolymer on rigid PVC base.
- Perforated bottom for fixing by screws or plugs.
- Bottom designed for fast fixing by silicone adhesives
- accessories are set onto the trunking with a simple click by 4 points.
- Resistance to mechanical shocks IK 06.
- Protection degree IP40 only if installed with the proper accessories.
- Wrap-around cover supplied already mounted on the bottom, it can be removed only by a proper tool.
- Standard bar length: 2m.
- Packed in strong cardboard boxes suitable for transport and storage.
- **Colour code: A=Slate grey.**




IP40



WHITE RAL 9001

SLATE GREY RAL 7021


ITEM	DESCRIPTION	DIMENSIONS W x H mm	COMPARTMENT NR.	PACKAGING m / PIECES
ECMC2213-1B	Minitrunking wit wrap-around cover	22x13	1	100 m
ECAI2213B	Internal angle	22x13	-	2/50 pcs
ECAE2213B	External angle	22x13	-	2/50 pcs
ECAP2213B	Flat angle	22x13	-	2/50 pcs
ECGU2213B	Straight joint	22x13	-	2/50 pcs
ECT2213B	T-joint	22x13	-	2/50 pcs.
ECTT2213B	End cap	22x13	-	2/50 pcs.
ECSPA60B	Device box hole center distance 60/67 mm	97x87x73	-	1/25 pcs
ECSPA70B	Box for 3 Italian standard device h.c. 83,5 mm	130x90x45,5	-	1/50 pcs
ECSPA80B	Box for 4 Italian standard device h.c. 108,5 mm	151x90x46	-	1/35 pcs
ECSPA90B	Box for 6 Italian standard device h.c. 100 mm	218x94x46	-	1/24 pcs
ECCPB	Blank cover for box hole center distance 83,5 mm	117x80x5	-	5/50 pcs
ECSM0	Blank box	52x64x46	-	-/30 pcs
ECSM1	Box for 1 device type "Magic"	52x64x46	-	-/30 pcs
ECSM2	Box for 2 devices type "Magic"	52x64x46	-	-/30 pcs
ECSSB1	Separation and derivation box	70x70x28	-	1/25 pcs
ECSPA2213B	French standard "saillie" device box	118x74x24	-	1/30 pcs

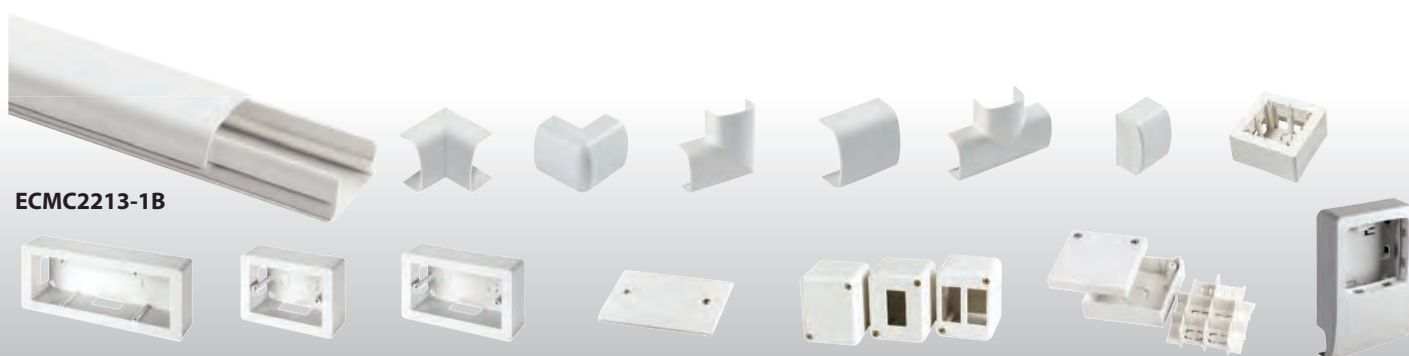

MINITRUNKING SYSTEMS WITH WRAP-AROUND COVER ROUNDED 32x13

MAIN TECHNICAL FEATURES:


- Made of self-extinguishing technopolymer on rigid PVC base.
- Perforated bottom for fixing by screws or plugs.
- Bottom designed for fast fixing by silicone adhesives
- Accessories are set onto the trunking with a simple click by 4 points.
- Resistance to mechanical shocks IK 06.
- Protection degree IP40 only if installed with the proper accessories.
- Wrap-around cover supplied already mounted on the bottom, it can be removed only by a proper tool.
- Standard bar length: 2m.
- Packed in strong cardboard boxes suitable for transport and storage.
- **Colour code: A=Slate grey.**


IP40
CE

WHITE RAL 9001

SLATE GREY RAL 7021

ITEM	DESCRIPTION	DIMENSIONS W x H mm	COMPARTMENT NR.	PACKAGING m / PIECES
ECMC3213-1B	Minitrunking wit wrap-around cover	32x13	1	80 m
ECAI3213B	Internal angle	32x13	-	2/50 pcs
ECAE3213B	External angle	32x13	-	2/50 pcs
ECAP3213B	Flat angle	32x13	-	2/50 pcs
ECGU3213B	Straight joint	32x13	-	2/50 pcs
ECT3213B	T-joint	32x13	-	2/50 pcs
ECTT3213B	End cap	32x13	-	2/50 pcs
ECSPA60B	Device box hole center distance 60/67 mm	97x87x73	-	1/25 pcs
ECSPA70B	Box for 3 Italian standard device h.c. 83,5 mm	130x90x45,5	-	1/50 pcs
ECSPA80B	Box for 4 Italian standard device h.c. 108,5 mm	151x90x46	-	1/35 pcs
ECSPA90B	Box for 6 Italian standard device h.c. 100 mm	218x94x46	-	1/24 pcs
ECCPB	Blank cover for box hole center distance 83,5 mm	117x80x5	-	5/50 pcs
ECSM0	Blank box	52x64x46	-	-/30 pcs
ECSM1	Box for 1 device type "Magic"	52x64x46	-	-/30 pcs
ECSM2	Box for 2 devices type "Magic"	52x64x46	-	-/30 pcs
ECSSB1	Separation and derivation box	70x70x28	-	1/25 pcs
ECSPA3213B	French standard "saillie" device box	118x74x24	-	1/30 pcs

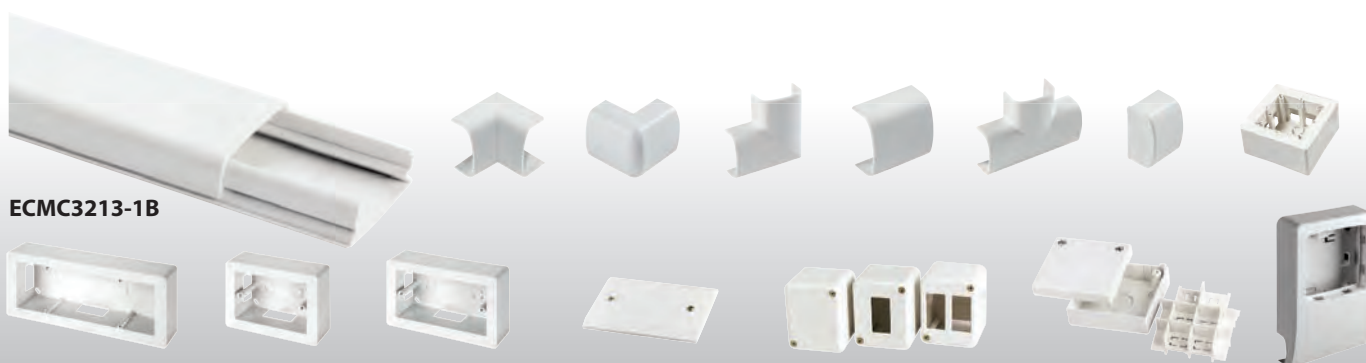
ECMC3213-1B

MINITRUNKING SYSTEM 20x10

MAIN TECHNICAL FEATURES:


- Made of self-extinguishing technopolymer on rigid PVC base.
- Perforated bottom for fixing by screws or plugs.
- Bottom designed for fast fixing by silicone adhesives
- Accessories are set onto the trunking with a simple click.
- Front-hooking cover supplied already mounted on the bottom.
- Standard bar length: 2m.
- Packed in strong cardboard boxes suitable for transport and storage.

CE


IP40

WHITE RAL 9001

ITEM	DESCRIPTION	DIMENSIONS W x H mm	COMPARTMENT NR.	PACKAGING m / PIECES
ECMC2010B	Minitrunking with front-hooking cover	20x10	1	100 m
ECMC2010AB	Minitrunking wit wrap-around cover	20x10	1	100 m
ECAI2010B	Internal angle	20x10	-	2/50 pcs
ECAE2010B	External angle	20x10	-	2/50 pcs
ECAP2010B	Flat angle	20x10	-	2/50 pcs
ECGU2010B	Straight joint	20x10	-	2/50 pcs
ECT2010B	T-joint	20x10	-	2/50 pcs
ECTT2010B	End cap	20x10	-	2/50 pcs
ECSPA60B	Device box hole center distance 60/67 mm	97x87x73	-	1/25 pcs
ECSPA70B	Box for 3 Italian standard device h.c. 83,5 mm	130x90x45,5	-	1/50 pcs
ECSPA80B	Box for 4 Italian standard device h.c. 108,5 mm	151x90x46	-	1/35 pcs
ECSPA90B	Box for 6 Italian standard device h.c. 100 mm	218x94x46	-	1/24 pcs
ECCPB	Blanck cover for box hole center distance 83,5 mm	117x80x5	-	5/50 pcs
ECSM0	Blank box	52x64x46	-	-/30 pcs
ECSM1	Box for 1 device type "Magic"	52x64x46	-	-/30 pcs
ECSM2	Box for 2 devices type "Magic"	52x64x46	-	-/30 pcs
ECSSB1	Separation and derivation box	70x70x28	-	1/25 pcs

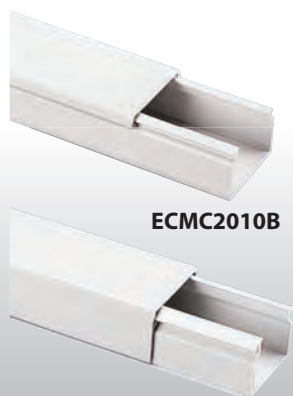

ECMC2010B

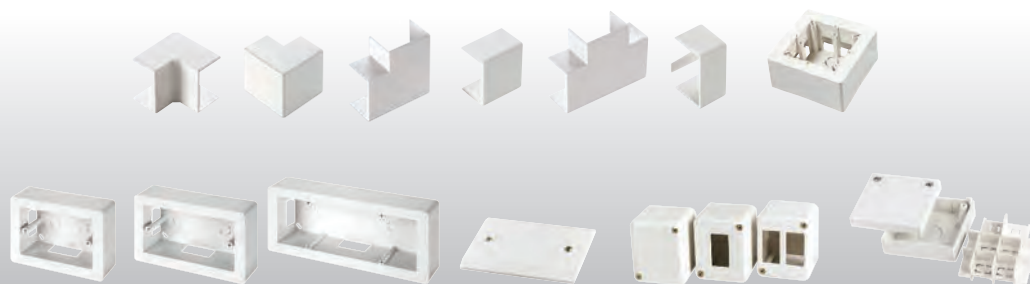

ECMC2010AB

MINITRUNKING SYSTEM 22x10


MAIN TECHNICAL FEATURES:

- Made of self-extinguishing technopolymer on rigid PVC base.
- Perforated bottom for fixing by screws or plugs.
- Bottom designed for fast fixing by silicone adhesives
- Accessories are set onto the trunking with a simple click.
- Front-hooking cover supplied already mounted on the bottom.
- Standard bar length: 2m.
- Packed in strong cardboard boxes suitable for transport and storage.


IP40

WHITE RAL 9001

ITEM	DESCRIPTION	DIMENSIONS W x H mm	COMPARTMENT NR.	PACKAGING m / PIECES
ECMC2210-1B	Minitrunking with front-hooking cover	22x10	1	100 m
ECMC2210B	Minitrunking with front-hooking cover	22x10	2	100 m
ECAI2210B	Internal angle	22x10	-	2/50 pcs
ECAE2210B	External angle	22x10	-	2/50 pcs
ECAP2210B	Flat angle	22x10	-	2/50 pcs
ECGU2210B	Straight joint	22x10	-	2/50 pcs
ECT2210B	T-joint	22x10	-	2/50 pcs
ECTT2210B	End cap	22x10	-	2/50 pcs
ECSPA60B	Device box hole center distance 60/67 mm	97x87x73	-	1/25 pcs
ECSPA70B	Box for 3 Italian standard device h.c. 83,5 mm	130x90x45,5	-	1/50 pcs
ECSPA80B	Box for 4 Italian standard device h.c. 108,5 mm	151x90x46	-	1/35 pcs
ECSPA90B	Box for 6 Italian standard device h.c. 100 mm	218x94x46	-	1/24 pcs
ECCPB	Blank cover for box hole center distance 83,5 mm	117x80x5	-	5/50 pcs
ECSM0	Blank box	52x64x46	-	-/30 pcs
ECSM1	Box for 1 device type "Magic"	52x64x46	-	-/30 pcs
ECSM2	Box for 2 devices type "Magic"	52x64x46	-	-/30 pcs
ECSSB1	Separation and derivation box	70x70x28	-	1/25 pcs
ECSPA45B	French standard device 45x45 mm box	100x68x51	-	1/30 pcs

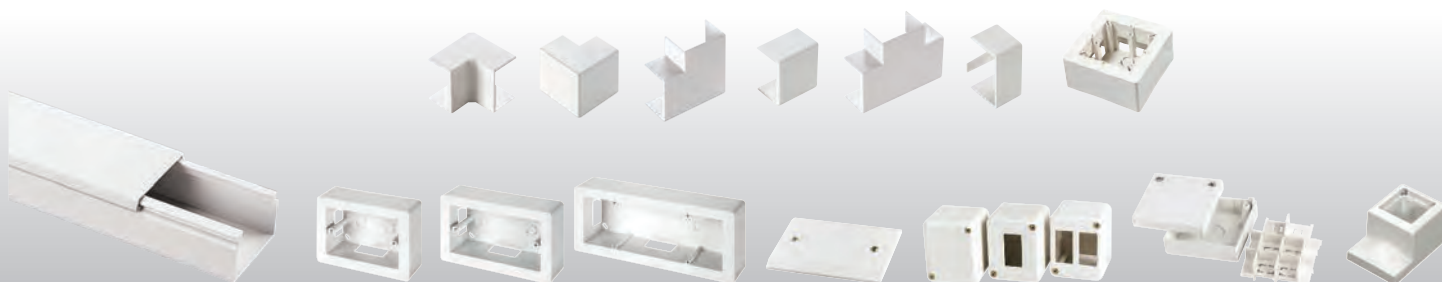
ECMC2210-1B

MINITRUNKING SYSTEM 30x10

MAIN TECHNICAL FEATURES:


- Made of self-extinguishing technopolymer on rigid PVC base.
- Perforated bottom for fixing by screws or plugs.
- Bottom designed for fast fixing by silicone adhesives
- Accessories are set onto the trunking with a simple click.
- Front-hooking cover supplied already mounted on the bottom.
- Standard bar length: 2m.
- Packed in strong cardboard boxes suitable for transport and storage.

CE

IP40

WHITE RAL 9001

ITEM	DESCRIPTION	DIMENSIONS W x H mm	COMPARTMENT NR.	PACKAGING m / PIECES
ECMC3010-1B	Minitrunking with front-hooking cover	30x10	1	80 m
ECMC3010B	Minitrunking with front-hooking cover	30x10	2	80 m
ECMC3010AB	Minitrunking wit wrap-around cover	30x10	2	80 m
ECAI3010B	Internal angle	30x10	-	2/50 pcs
ECAE3010B	External angle	30x10	-	2/50 pcs
ECAP3010B	Flat angle	30x10	-	2/50 pcs
ECGU3010B	Straight joint	30x10	-	2/50 pcs
ECT3010B	T-joint	30x10	-	2/50 pcs
ECTT3010B	End cap	30x10	-	2/50 pcs
ECSPA60B	Device box hole center distance 60/67 mm	97x87x73	-	1/25 pcs
ECSPA70B	Box for 3 Italian standard device h.c. 83,5 mm	130x90x45,5	-	1/50 pcs
ECSPA80B	Box for 4 Italian standard device h.c. 108,5 mm	151x90x46	-	1/35 pcs
ECSPA90B	Box for 6 Italian standard device h.c. 100 mm	218x94x46	-	1/24 pcs
ECCPB	Blanck cover for box hole center distance 83,5 mm	117x80x5	-	5/50 pcs
ECSM0	Blank box	52x64x46	-	-/30 pcs
ECSM1	Box for 1 device type "Magic"	52x64x46	-	-/30 pcs
ECSM2	Box for 2 devices type "Magic"	52x64x46	-	-/30 pcs
ECSSB1	Separation and derivation box	70x70x28	-	1/25 pcs
ECSPA45B	French standard device 45x45 mm box	100x68x51	-	1/30 pcs

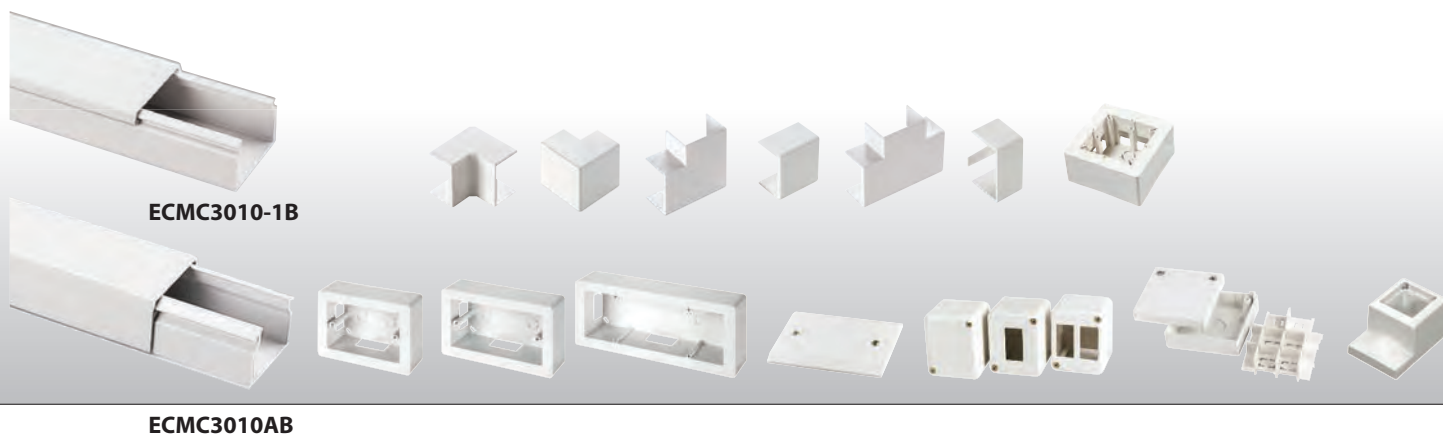

MINITRUNKING SYSTEM 40x10

MAIN TECHNICAL FEATURES:


- Made of self-extinguishing technopolymer on rigid PVC base.
- Perforated bottom for fixing by screws or plugs.
- Bottom designed for fast fixing by silicone adhesives
- Accessories are set onto the trunking with a simple click.
- Front-hooking cover supplied already mounted on the bottom.
- Standard bar length: 2m.
- Packed in strong cardboard boxes suitable for transport and storage.



IP40



ITEM	DESCRIPTION	DIMENSIONS W x H mm	COMPARTMENT NR.	PACKAGING m / PIECES
ECMC4010B	Minitrunking with front-hooking cover	40x10	3	60 m
ECAI4010B	Internal angle	40x10	-	2/50 pcs
ECAE4010B	External angle	40x10	-	2/50 pcs
ECAP4010B	Flat angle	40x10	-	2/50 pcs
ECGU4010B	Straight joint	40x10	-	2/50 pcs
ECT4010B	T-joint	40x10	-	2/50 pcs
ECTT4010B	End cap	40x10	-	2/50 pcs
ECSPA60B	Device box hole center distance 60/67 mm	97x87x73	-	1/25 pcs
ECSPA70B	Box for 3 Italian standard device h.c. 83,5 mm	130x90x45,5	-	1/50 pcs
ECSPA80B	Box for 4 Italian standard device h.c. 108,5 mm	151x90x46	-	1/35 pcs
ECSPA90B	Box for 6 Italian standard device h.c. 100 mm	218x94x46	-	1/24 pcs
ECCPB	Blank cover for box hole center distance 83,5 mm	117x80x5	-	5/50 pcs
ECSM0	Blank box	52x64x46	-	-/30 pcs
ECSM1	Box for 1 device type "Magic"	52x64x46	-	-/30 pcs
ECSM2	Box for 2 devices type "Magic"	52x64x46	-	-/30 pcs
ECSSB1	Separation and derivation box	70x70x28	-	1/25 pcs

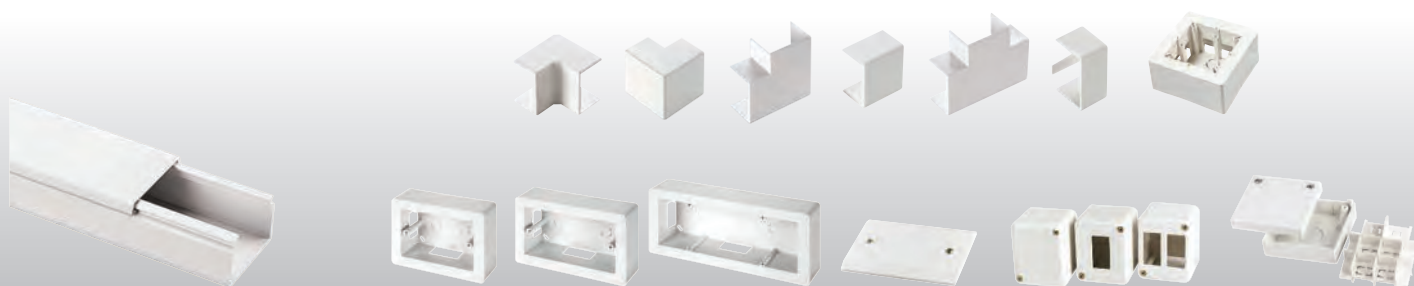

ECMC4010B

MINITRUNKING SYSTEM 15x17

MAIN TECHNICAL FEATURES:


- Made of self-extinguishing technopolymer on rigid PVC base.
- Perforated bottom for fixing by screws or plugs.
- Bottom designed for fast fixing by silicone adhesives
- Accessories are set onto the trunking with a simple click.
- Front-hooking cover supplied already mounted on the bottom.
- Standard bar length: 2m.
- Packed in strong cardboard boxes suitable for transport and storage.

CE


IP40

WHITE RAL 9001


ITEM	DESCRIPTION	DIMENSIONS W x H mm	COMPARTMENT NR.	PACKAGING m / PIECES
ECMC1517B	Minitrunking with front-hooking cover	15x17	1	100 m
ECMC1517AB	Minitrunking wit wrap-around cover	15x17	1	80 m
ECAI1517B	Internal angle	15x17	-	2/50 pcs
ECAE1517B	External angle	15x17	-	2/50 pcs
ECAP1517B	Flat angle	15x17	-	2/50 pcs
ECGU1517B	Straight joint	15x17	-	2/50 pcs
ECT1517B	T-joint	15x17	-	2/50 pcs
ECTT1517B	End Cap	15x17	-	2/50 pcs
ECSPA60B	Device box hole center distance 60/67 mm	97x87x73	-	1/25 pcs
ECSPA70B	Box for 3 Italian standard device h.c. 83,5 mm	130x90x45,5	-	1/50 pcs
ECSPA80B	Box for 4 Italian standard device h.c. 108,5 mm	151x90x46	-	1/35 pcs
ECSPA90B	Box for 6 Italian standard device h.c. 100 mm	218x94x46	-	1/24 pcs
ECCPB	Blank cover for box hole center distance 83,5 mm	117x80x5	-	5/50 pcs
ECSM0	Blank box	52x64x46	-	-/30 pcs
ECSM1	Box for 1 device type "Magic"	52x64x46	-	-/30 pcs
ECSM2	Box for 2 devices type "Magic"	52x64x46	-	-/30 pcs
ECSSB1	Separation and derivation box	70x70x28	-	1/25 pcs



ECMC1517B



ECMC1517AB

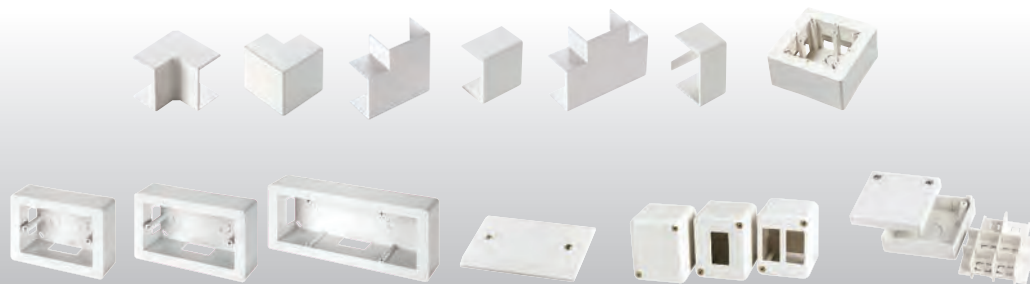

MINITRUNKING SYSTEM 25x17

MAIN TECHNICAL FEATURES:


- Made of self-extinguishing technopolymer on rigid PVC base.
- Perforated bottom for fixing by screws or plugs.
- Bottom designed for fast fixing by silicone adhesives
- Accessories are set onto the trunking with a simple click.
- Front-hooking cover supplied already mounted on the bottom.
- Standard bar length: 2m.
- Packed in strong cardboard boxes suitable for transport and storage.




IP40




ITEM	DESCRIPTION	DIMENSIONS W x H mm	COMPARTMENT NR.	PACKAGING m / PIECES
ECMC2517B	Minitrunking with front-hooking cover	25x17	1	80 m
ECMC2517AB	Minitrunking wit wrap-around cover	25x17	1	60 m
ECAI2517B	Internal angle	25x17	-	2/50 pcs
ECAE2517B	External angle	25x17	-	2/50 pcs
ECAP2517B	Flat angle	25x17	-	2/50 pcs
ECGU2517B	Straight joint	25x17	-	2/50 pcs
ECT2517B	T-joint	25x17	-	2/50 pcs
ECTT2517B	End Cap	25x17	-	2/50 pcs
ECSPA60B	Device box hole center distance 60/67 mm	97x87x73	-	1/25 pcs
ECSPA70B	Box for 3 Italian standard device h.c. 83,5 mm	130x90x45,5	-	1/50 pcs
ECSPA80B	Box for 4 Italian standard device h.c. 108,5 mm	151x90x46	-	1/35 pcs
ECSPA90B	Box for 6 Italian standard device h.c. 100 mm	218x94x46	-	1/24 pcs
ECCPB	Blanck cover for box hole center distance 83,5 mm	117x80x5	-	5/50 pcs
ECSM0	Blank box	52x64x46	-	-/30 pcs
ECSM1	Box for 1 device type "Magic"	52x64x46	-	-/30 pcs
ECSM2	Box for 2 devices type "Magic"	52x64x46	-	-/30 pcs
ECSSB1	Separation and derivation box	70x70x28	-	1/25 pcs



ECMC2517B



ECMC2517AB

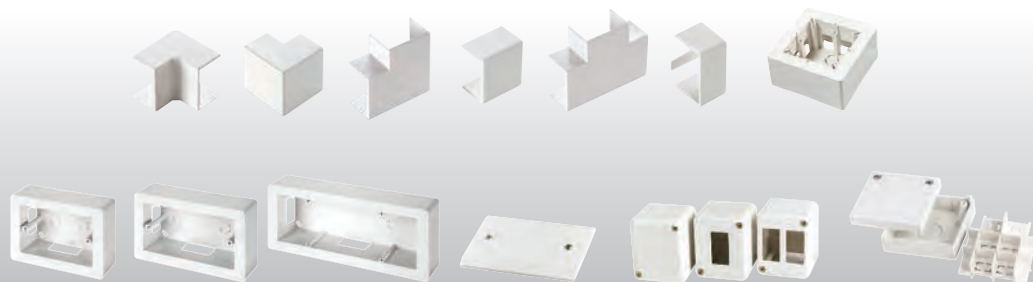

MINITRUNKING SYSTEM 40x17

MAIN TECHNICAL FEATURES:



- Made of self-extinguishing technopolymer on rigid PVC base.
- Perforated bottom for fixing by screws or plugs.
- Bottom designed for fast fixing by silicone adhesives
- Accessories are set onto the trunking with a simple click.
- Front-hooking cover supplied already mounted on the bottom.
- Standard bar length: 2m.
- Packed in strong cardboard boxes suitable for transport and storage.

CE

IP40

WHITE RAL 9001

ITEM	DESCRIPTION	DIMENSIONS W x H mm	COMPARTMENT NR.	PACKAGING m / PIECES
ECMC4017-1B	Minitrunking with front-hooking cover	40x17	1	50 m
ECMC4017B	Minitrunking with front-hooking cover	40x17	2	50 m
ECMC4017AB	Minitrunking wit wrap-around cover	40x17	2	80 m
ECAI4017B	Internal angle	40x17	-	2/50 pcs
ECAE4017B	External angle	40x17	-	2/50 pcs
ECAP4017B	Flat angle	40x17	-	2/50 pcs
ECGU4017B	Straight joint	40x17	-	2/50 pcs
ECT4017B	T-joint	40x17	-	2/50 pcs
ECTT4017B	End Cap	40x17	-	2/50 pcs
ECSPA60B	Device box hole center distance 60/67 mm	97x87x73	-	1/25 pcs
ECSPA70B	Box for 3 Italian standard device h.c. 83,5 mm	130x90x45,5	-	1/50 pcs
ECSPA80B	Box for 4 Italian standard device h.c. 108,5 mm	151x90x46	-	1/35 pcs
ECSPA90B	Box for 6 Italian standard device h.c. 100 mm	218x94x46	-	1/24 pcs
ECCPB	Blanck cover for box hole center distance 83,5 mm	117x80x5	-	5/50 pcs
ECSSB1	Separation and derivation box	70x70x28	-	1/25 pcs

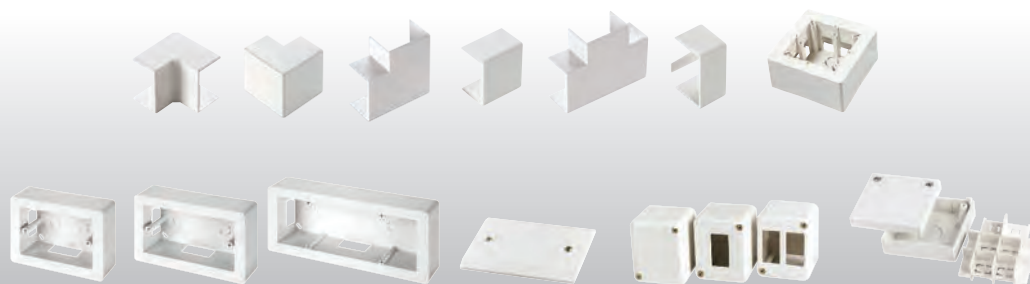

MINITRUNKING SYSTEM 60x17

MAIN TECHNICAL FEATURES:


- Made of self-extinguishing technopolymer on rigid PVC base.
- Perforated bottom for fixing by screws or plugs.
- Bottom designed for fast fixing by silicone adhesives
- Accessories are set onto the trunking with a simple click.
- Front-hooking cover supplied already mounted on the bottom.
- Standard bar length: 2m.
- Packed in strong cardboard boxes suitable for transport and storage.



IP40



ITEM	DESCRIPTION	DIMENSIONS W x H mm	COMPARTMENT NR.	PACKAGING m / PIECES
ECMC6017B	Minitrunking with front-hooking cover	60x17	3	70 m
ECAI6017B	Internal angle	60x17	-	2/50 pcs
ECAE6017B	External angle	60x17	-	2/50 pcs
ECAP6017B	Flat angle	60x17	-	2/50 pcs
ECGU6017B	Straight joint	60x17	-	2/50 pcs
ECT6017B	T-joint	60x17	-	2/50 pcs
ECTT6017B	End Cap	60x17	-	2/50 pcs
ECSPA60B	Device box hole center distance 60/67 mm	97x87x73	-	1/25 pcs
ECSPA70B	Box for 3 Italian standard device h.c. 83,5 mm	130x90x45,5	-	1/50 pcs
ECSPA80B	Box for 4 Italian standard device h.c. 108,5 mm	151x90x46	-	1/35 pcs
ECSPA90B	Box for 6 Italian standard device h.c. 100 mm	218x94x46	-	1/24 pcs
ECCPB	Blank cover for box hole center distance 83,5 mm	117x80x5	-	5/50 pcs
ECSSB1	Separation and derivation box	70x70x28	-	1/25 pcs

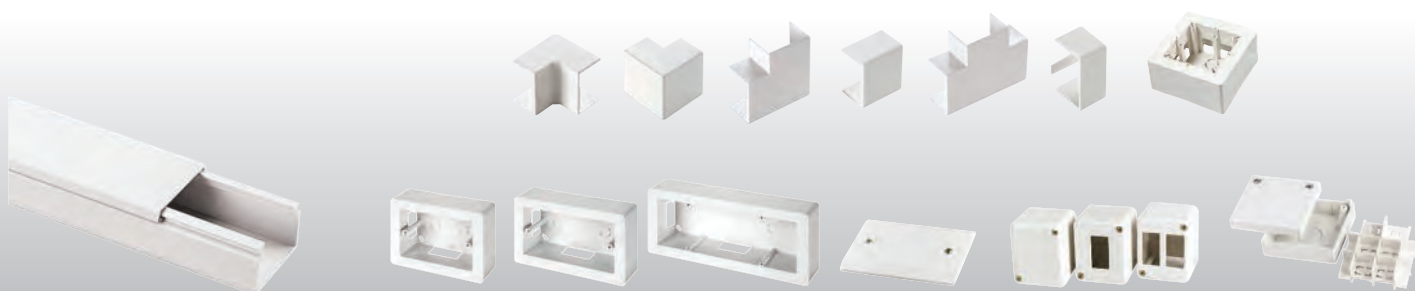

ECMC6017B

MINITRUNKING SYSTEM 25x25

MAIN TECHNICAL FEATURES:

- Made of self-extinguishing technopolymer on rigid PVC base.
- Perforated bottom for fixing by screws or plugs.
- Bottom designed for fast fixing by silicone adhesives
- Accessories are set onto the trunking with a simple click.
- Front-hooking cover supplied already mounted on the bottom.
- Standard bar length: 2m.
- Packed in strong cardboard boxes suitable for transport and storage.

CE

IP40

WHITE RAL 9001


ITEM	DESCRIPTION	DIMENSIONS W x H mm	COMPARTMENT NR.	PACKAGING m / PIECES
ECMC2525B	Minitrunking with front-hooking cover	25x25	1	100 m
ECMC2525AB	Minitrunking wit wrap-around cover	25x25	1	80 m
ECAI2525B	Internal angle	25x25	-	2/50 pcs
ECAE2525B	External angle	25x25	-	2/50 pcs
ECAP2525B	Flat angle	25x25	-	2/50 pcs
ECGU2525B	Straight joint	25x25	-	2/50 pcs
ECT2525B	T-joint	25x25	-	2/50 pcs
ECTT2525B	End Cap	25x25	-	2/50 pcs
ECSPA60B	Device box hole center distance 60/67 mm	97x87x73	-	1/25 pcs
ECSPA70B	Box for 3 Italian standard device h.c. 83,5 mm	130x90x45,5	-	1/50 pcs
ECSPA80B	Box for 4 Italian standard device h.c. 108,5 mm	151x90x46	-	1/35 pcs
ECSPA90B	Box for 6 Italian standard device h.c. 100 mm	218x94x46	-	1/24 pcs
ECCPB	Blanck cover for box hole center distance 83,5 mm	117x80x5	-	5/50 pcs
ECSSB2	Separation and derivation box	165x165x75	-	1/5 pcs



ECMC2525B



ECMC2525AB

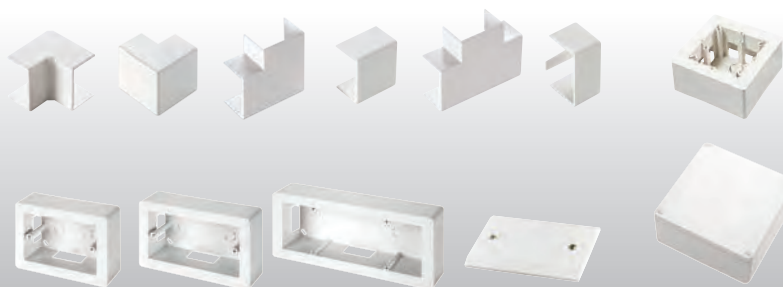

MINITRUNKING SYSTEM 40x25

MAIN TECHNICAL FEATURES:

- Made of self-extinguishing technopolymer on rigid PVC base.
- Perforated bottom for fixing by screws or plugs.
- Bottom designed for fast fixing by silicone adhesives
- Accessories are set onto the trunking with a simple click.
- Front-hooking cover supplied already mounted on the bottom.
- Standard bar length: 2m.
- Packed in strong cardboard boxes suitable for transport and storage.




IP40




ITEM	DESCRIPTION	DIMENSIONS W x H mm	COMPARTMENT NR.	PACKAGING m / PIECES
ECMC4025B	Minitrunking with front-hooking cover	40x25	1	80 m
ECMC4025AB	Minitrunking wit wrap-around cover	40x25	1	60 m
ECAI4025B	Internal angle	40x25	-	2/50 pcs
ECAE4025B	External angle	40x25	-	2/50 pcs
ECAP4025B	Flat angle	40x25	-	2/50 pcs
ECGU4025B	Straight joint	40x25	-	2/50 pcs
ECT4025B	T-joint	40x25	-	2/50 pcs
ECTT4025B	End Cap	40x25	-	2/50 pcs
ECSPA60B	Device box hole center distance 60/67 mm	97x87x73	-	1/25 pcs
ECSPA70B	Box for 3 Italian standard device h.c. 83,5 mm	130x90x45,5	-	1/50 pcs
ECSPA80B	Box for 4 Italian standard device h.c. 108,5 mm	151x90x46	-	1/35 pcs
ECSPA90B	Box for 6 Italian standard device h.c. 100 mm	218x94x46	-	1/24 pcs
ECCPB	Blanck cover for box hole center distance 83,5 mm	117x80x5	-	5/50 pcs
ECSSB2	Separation and derivation box	165x165x75	-	1/5 pcs



ECMC4025B



ECMC4025AB

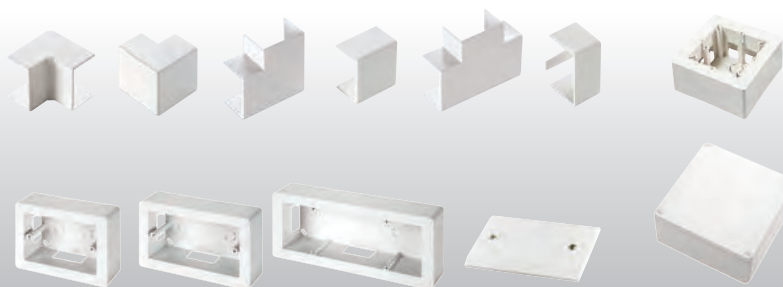

FLOOR CABLE TRUNKINGS **SERIES CAP**

MAIN TECHNICAL FEATURES:

- Made of self-extinguishing technopolymer on rigid PVC base.
- Resistance to mechanical shocks: 6J.
- Three separate compartment for different circuits.
- Perforated bottom for fixing by screws or plugs.
- Wrap-around cover supplied already mounted on the bottom, it can be removed only by a proper tool.
- Standard bar length: 2m.
- Packed in strong cardboard boxes suitable for transport and storage.
- Resistant to being walked, flow rate 0.4 Kg / cm².
- **Colour code: B= White, G= Grey, A= Slate Grey.**

CE


WHITE RAL 9001

GREY RAL 7030

SLATE GREY RAL 7021

Floor cable trunking

ITEM	EXTERNAL DIMENSIONS W x H mm	COMPARTMENT NR.	SECTION AREA mm ²	PACKAGING m
ECCAP7517B	75x17	3	516	50
ECCAP7517G	75x17	3	516	50
ECCAP7517A	75x17	3	516	50
ECCAP5012B	50x12	3	192	50
ECCAP5012G	50x12	3	192	50

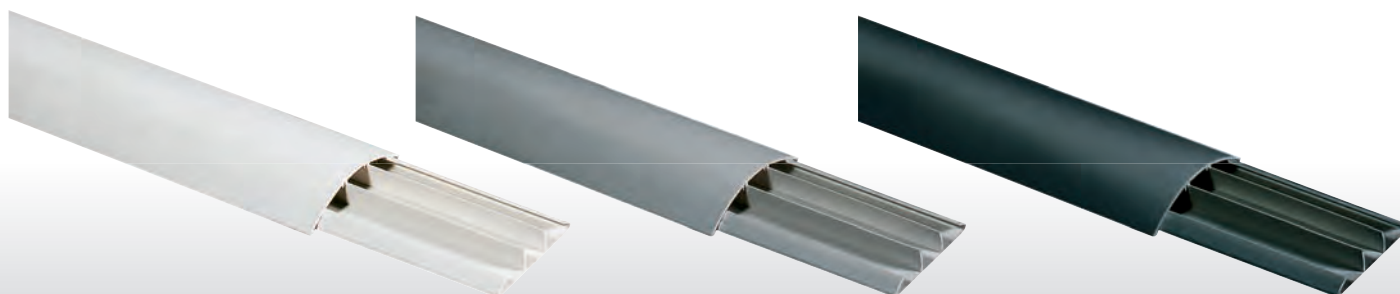

ECCAP7517B

ECCAP7517G

ECCAP7517A

DOUBLE -SIDED MODULAR FLOOR BOXES **SERIES 160**

MAIN TECHNICAL FEATURES:

- Made of shockproof technopolymer.
- Protection degree between floor and box.
- It can be installed on concrete or floating floors.
- Cap included for singles-sided use.
- Product complying with the Standards CEI 64-8 and EN 50085-1, EN 50085-2-4.
- Prepared for fitting with floor cable trunkings 75x17 and 50x12 mm.
- Prepared for 2 + 2 devices with 60 mm centre hole.



CE

GREY RAL 7030

SLATE GREY RAL 7021

Double-sided modular floor boxes

ITEM	EXTERNAL DIMENSIONS W x H x D mm	COLOUR	TYPE	DEVICE NR.	HOLE CENTRE DISTANCE mm	PROTECTION DEGREE IP	PACKAGING PIECES
EC16001	226x149x150	GREY	Double-sided	4 (2x2)	60+60	54	1/10
EC16002	226x149x150	SLATE GREY	Double-sided	4 (2x2)	60+60	54	1/10

Horizontal and vertical expansions

ITEM	EXTERNAL DIMENSIONS W x H x D mm	COLOUR	TYPE	DEVICE NR.	HOLE CENTRE DISTANCE mm	PROTECTION DEGREE IP	PACKAGING PIECES
EC16001H	176x149x150	GREY	Horizontal	4 (2x2)	60+60	54	1/10
EC16002H	176x149x150	SLATE GREY	Horizontal	4 (2x2)	60+60	54	1/10
EC16001V	176x108x150	GREY	Vertical	4 (2x2)	60+60	54	1/10
EC16002V	176x108x150	SLATE GREY	Vertical	4 (2x2)	60+60	54	1/10



EC16002
+
EC16002H

EC16002
+
EC16002H
+
EC16002V
+
EC16002V



WALL MOUNTING WHITE MODULAR ENCLOSURES SERIES 600

MAIN TECHNICAL FEATURES:

- Reversible door made of smoky grey polycarbonate.
- Suitable for housing the brass terminals.
- Suitable for plumbing of the cover.
- Galvanized steel DIN rail already mounted.
- Lid for unused modules.
- Self-adhesive label to identify the different circuit.
- Screw caps for double insulation.

CE

IP40

WHITE RAL 9001

To be used in combination with the minitrunkings

ITEM	EXTERNAL DIMENSIONS W x H x D mm	MODULE NR. (17,5 mm)	POWER LOSS (Watt) EN 60670-24	PACKAGING PIECES
EC60004B	150x170x100	4	22	1/22
EC60008B	200x180x100	8	14	1/15
EC60012B	280x220x100	12	21	1/8
EC60018B	400x265x130	18	24	-/1
EC60024B	280x350x100	24 (2x12)	30	-/1
EC60036B	400x400x130	36 (2x18)	47	-/1
EC60054B	400x600x130	54 (3x18)	72	-/1
EC60072B	420x885x150	72 (4x18)	85	-/1

Available with solid white door on request



EC60004B

EC60008B

EC60012B

EC60018B

EC60024B

EC60036B


EC60054B

EC60072B

■ INSTALLATION INSTRUCTIONS FOR THE MINITRUNKING SYSTEMS



SERIES MC

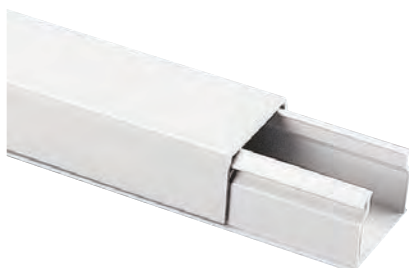

SERIES MCA



SERIES MA

To install the minitrunkings or the cable trunkings on walls or ceilings, or in any case on non-conducting surfaces, it is strongly recommended using expanding plugs (our item TC), minimum diameter 4mm and maximum diameter 6mm with their screws, or steel nails, minimum 30cm and maximum 70cm one from the other.

Always fix the trunking close to the accessories.

To anchor the trunking to metallic walls not connected to the earthing circuit or in any case to conducting surfaces, it is suggested employing a silicone adhesive or a common mastic, easy to find on the market; taking into account that the indications for use must be carefully followed.

For not particularly hard uses it is suggested to install the trunkings by a double-sided adhesive tape, so that the installation turns out to be easier and quicker. Before proceeding please verify the holding of the adhesive tape on a test sample, which must be smooth and clean.

To cut the trunking and its cover please use a fine toothed hacksaw.

To change direction please use our accessories with the same dimension as the trunking, as indicated in our catalogue and according to the indications of the reference Standards EN50085-1, EN50085-2-1.



Internal angle



External angle



Flat angle



Straight joint




T joint



End cap

Once the trunking has been fixed to the wall, the separators, the junction and/or device boxes have been installed and the wiring has been done, the cover can be mounted on the bottom with a simple click; if necessary cut the lid in order to hook the accessories (placed as indicated below) on to the trunking.


In order to gain the correct protection degree IP, the accessories must be fixed to the trunking by securing the tang of the end cap to the trunking through the passing screw and by sticking the accessories for the change of direction to the trunking bottom with a silicon mastic.




Internal angle




External angle



Flat angle




**Separation box
for minitrunkings with separators**

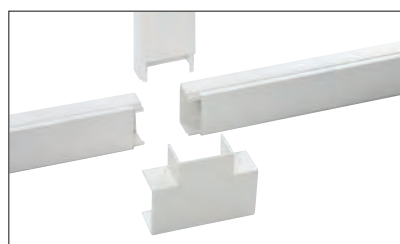

T-joint















Straight joint

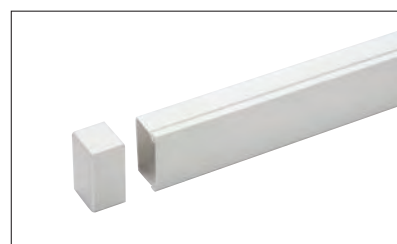

End cap

CHOICE TABLES FOR MINITRUNKING SYSTEMS

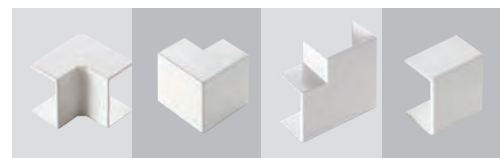


	ITEM						ITEM			
DIMENSIONS WxH mm	FRONT-HOOKING COVER	WRAP-AROUND COVER	COMPARTMEN NR.	TYPE	SECTION mm ²	PACKAGING m	INTERNAL ANGLE	EXTERNAL ANGLE	FLAT ANGLE	STRAIGHT JOINT
20x10	ECMC2010B	ECMC2010AB	1		126	100	ECAI2010B	ECAE2010B	ECAP2010B	ECGU2010B
22x10	ECMC2210-1B	-	1		128	100	ECAI2210B	ECAE2210B	ECAP2210B	ECGU2210B
22x10	ECMC2210B	-	2		126	100	ECAI2210B	ECAE2210B	ECAP2210B	ECGU2210B
30x10	ECMC3010-1B	-	1		174	80	ECAI3010B	ECAE3010B	ECAP3010B	ECGU3010B
30x10	ECMC3010B	ECMC3010AB	2		172	80	ECAI3010B	ECAE3010B	ECAP3010B	ECGU3010B
40x10	ECMC4010B	-	3		220	60	ECAI4010B	ECAE4010B	ECAP4010B	ECGU4010B
15x17	ECMC1517B	ECMC1517AB	1		168	100-80	ECAI1517B	ECAE1517B	ECAP1517B	ECGU1517B
25x17	ECMC2517B	ECMC2517AB	1		249	80-60	ECAI2517B	ECAE2517B	ECAP2517B	ECGU2517B
40x17	ECMC4017-1B	-	1		418	50	ECAI4017B	ECAE4017B	ECAP4017B	ECGU4017B
40x17	ECMC4017B	ECMC4017AB	2		416	50-80	ECAI4017B	ECAE4017B	ECAP4017B	ECGU4017B
60x17	ECMC6017B	-	3		685	70	ECAI6017B	ECAE6017B	ECAP6017B	ECGU6017B
50x20	ECMC5020B	-	1		625	60	-	-	-	-
50x20	ECMC5020-1B	-	2		620	60	-	-	-	-
50x20	ECMC5020-2B	-	3		615	60	-	-	-	-
25x25	ECMC2525B	MC2525AB	1		480	100-80	ECAI2525B	ECAE2525B	ECAP2525B	ECGU2525B
40x25	ECMC4025B	MC4025AB	1		752	80-60	ECAI4025B	ECAE4025B	ECAP4025B	ECGU4025B

CHOICE TABLES FOR WALL MOUNTING MODULAR ENCLOSURE **SERIES 600**

(for further information see page 249)

	ITEM	EC60004B	EC60008B	EC60012B	EC60018B	EC60024B	EC60036B	EC60054B	EC60072B
	EXTERNAL DIM. W x H x D mm	150x70x100	200x180x100	280x220x100	400x265x130	280x350x100	400x400x130	400x600x130	420x885x150

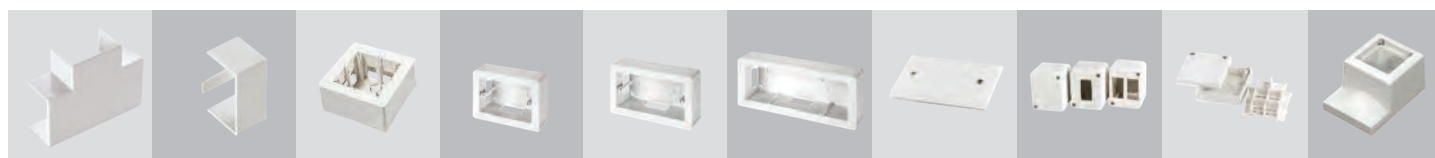

ITEM									
T-JOINT	END CAP	DEVICE BOX 60/67 mm	3 DEVICE BOX	4 DEVICE BOX	6 DEVICE BOX	BLANK COVER	SELF-SUPPORTING BOXES	SEPARATION BOX	DEVICE BOX 45x45
ECT2010B	ECTT2010B	ECSPA60B	ECSPA70B	ECSPA80B	ECSPA90B	ECCPB	ECSM0/1/2	ECSSB1	-
ECT2210B	ECTT2210B	ECSPA60B	ECSPA70B	ECSPA80B	ECSPA90B	ECCPB	ECSM0/1/2	ECSSB1	ECSPA45B
ECT2210B	ECTT2210B	ECSPA60B	ECSPA70B	ECSPA80B	ECSPA90B	ECCPB	ECSM0/1/2	ECSSB1	ECSPA45B
ECT3010B	ECTT3010B	ECSPA60B	ECSPA70B	ECSPA80B	ECSPA90B	ECCPB	ECSM0/1/2	ECSSB1	ECSPA45B
ECT3010B	ECTT3010B	ECSPA60B	ECSPA70B	ECSPA80B	ECSPA90B	ECCPB	ECSM0/1/2	ECSSB1	ECSPA45B
ECT4010B	ECTT4010B	ECSPA60B	ECSPA70B	ECSPA80B	ECSPA90B	ECCPB	ECSM0/1/2	ECSSB1	-
ECT1517B	ECTT1517B	ECSPA60B	ECSPA70B	ECSPA80B	ECSPA90B	ECCPB	ECSM0/1/2	ECSSB1	-
ECT2517B	ECTT2517B	ECSPA60B	ECSPA70B	ECSPA80B	ECSPA90B	ECCPB	ECSM0/1/2	ECSSB1	-
ECT4017B	ECTT4017B	ECSPA60B	ECSPA70B	ECSPA80B	ECSPA90B	ECCPB	-	ECSSB1	-
ECT4017B	ECTT4017B	ECSPA60B	ECSPA70B	ECSPA80B	ECSPA90B	ECCPB	-	ECSSB1	-
ECT6017B	ECTT6017B	ECSPA60B	ECSPA70B	ECSPA80B	ECSPA90B	ECCPB	-	ECSSB1	-
-	-	ECSPA60B	ECSPA70B	ECSPA80B	ECSPA90B	ECCPB	-	ECSSB2	-
-	-	ECSPA60B	ECSPA70B	ECSPA80B	ECSPA90B	ECCPB	-	ECSSB2	-
-	-	ECSPA60B	ECSPA70B	ECSPA80B	ECSPA90B	ECCPB	-	ECSSB2	-
ECT2525B	ECTT2525B	ECSPA60B	ECSPA70B	ECSPA80B	ECSPA90B	ECCPB	-	ECSSB2	-
ECT4025B	ECTT4025B	ECSPA60B	ECSPA70B	ECSPA80B	ECSPA90B	ECCPB	-	ECSSB2	-

The minitrunkings are supplied in the standard length of 2 mt $\pm$ 5 mm.